

HL 351

Domestic heating boiler



Learning objectives/experiments

- function of an oil burner
- operation of a heating boiler with an oil burner
- burner adjustment during operation
- temperature measurements in different areas of the combustion chamber
- calculation of the heating capacity of a heating boiler
- function of a plate heat exchanger
- temperature distributions in a plate heat exchanger

The illustration shows a similar unit

Description

- trainer for oil burners
- transparent oil tank
- can be extended to form a complete heating system

Different operating points can be investigated by changing the oil pressure after the preset boiler water temperature has been reached.


An integrated hot water circuit with plate heat exchanger simulates the heating circuit in a house. The heat generated can be dissipated via cooling water connections, enabling continuous operation. The heat transferred can be calculated.

Connections for an external heating circuit are provided on the rear of the boiler. This allows the HL 351 to be expanded into a complete heating system using training panels from the HL series.



HL 351

Domestic heating boiler

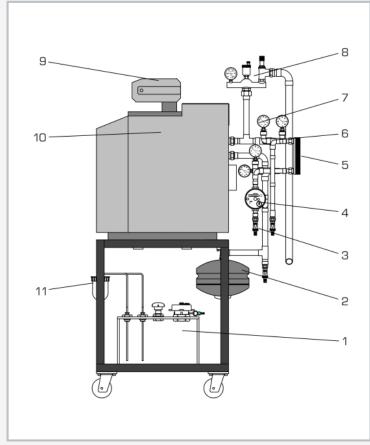

1 oil tank, 2 expansion vessel, 3 cold water connections, 4 water meter, 5 heat exchanger, 6 circulating pump, 7 thermometer, 8 boiler safety group, 9 control unit, 10 boiler, 11 double-strand oil filter

Specification

- [1] functional heating boiler with oil burner
- [2] boiler with control unit
- [3] heating and cooling circuit equipped with expansion vessel, pump, boiler safety group, thermometers, water meter, heat exchanger
- [4] transparent oil tank with filling and bleed connections
- [5] dissipation of generated heat via plate heat exchanger and cold water connection

Technical data

Boiler

- nominal rating: 17...21kW
- control unit with temperature limiter

Burner

■ nominal power: approx. 18kW

Pumr

- power consumption: 70W
- max. flow rate: 60L/min
- max. head: 4m

Plate heat exchanger: 3kW, 10 plates Boiler safety group in accordance with DIN 4751

- 2.5bar
- 50kW

Oil tank: 15L

Water meter: 2.5m³/h

Measuring ranges

■ temperature: 4x 0...120°C

230V, 50Hz, 1 phase 230V, 60Hz, 1 phase 120V, 60Hz, 1 phase

LxWxH: 1510x810x1620mm Weight: approx. 230kg

Required for operation

water connection, drain ventilation & exhaust gas routing required

Scope of delivery

- 1 trainer
- 1 manual



HL 351

Domestic heating boiler

Optional accessories

HL 860 Exhaust gas analyser